

## Ductile Iron Spigot Outlet "Aquaflow"




**Body:** Ductile Iron.  
**Bolts:** Stainless Steel.  
**Clamping Collar:** Ductile Iron.  
**Grating:** Ductile Iron.

**Sizes:**  
 50mm, 75mm, 100mm and 150mm

Nominal Bore/ Spigot O/D	Grating Type	Flow Rate * (l/s)	Area Drained ** (m2)	Weight (kg)
50/63	Flat	1.7	81	2.39
75/82	Flat	5	240	2.49
100/110	Flat	10.7	514	4.23
150/160	Flat	14.1	675	4.67

\* Based on a 35mm head of water over the outlet body. Flow rates are based on BS EN 12056:2000.  
 \*\* Based on a rainfall intensity of 75mm/hr.

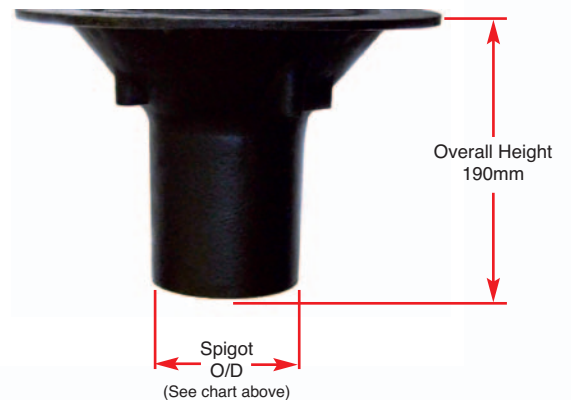

Windmill View,  
 Blackchurch,  
 Rathcoole,  
 Co. Dublin.  
 Ph. +353 (0)1 257 0388  
 Fax. +353 (0)1 257 0389  
 Email. sales@proflo.ie

